



**INDIAN BANK**  
**ZONAL OFFICE, Hyderabad**  
3-6-365, 4<sup>th</sup> floor, LIBERTY PLAZA, HIMAYATNAGAR  
**HYDERABAD-500029**

**TENDER DOCUMENT**  
**FOR**  
**INTERIOR FURNISHING AND ELECTRICAL WORKS OF**  
**INDIAN BANK SRINAGAR COLONY DAMC BRANCH AT SRINAGAR COLONY,**  
**HYDERABAD, TELANGANA**

**EMAPANELLED CONTRACORS OF INDIAN BANK ONLY**

**CONSULTANTS:**



**SRR Architechniques**

**Architects, Planners & Engineers**

Address:

3-6-460, 101&102, Gokul Kunj Apartments, Street No.5, Himayatnagar,  
Hyderabad, Telangana. Pin: 500029

 raghuram.srra@gmail.com

 +91 9959554845

## **CONTENTS**

<b>SL.NO.</b>	<b>PARTICULARS</b>
1.	General rules and instructions for the guidance of tenderers
2.	General conditions of contract
3.	Out line conditions of contract
4.	Additional conditions of contract
5.	Preamble to schedule of quantities
6.	Articles of agreement
7.	Specifications
8.	Schedule of quantities
9	Drawings

## **1.GENERAL RULES & INSTRUCTIONS FOR THE GUIDANCE OF TENDERERS**

1. Tenders are invited on behalf of Indian Bank Corporate office, No. 254-260, avvai shanmugam salai, Royapettah, Chennai - 600 014. **Tenders for Proposed Interior Furnishing and Electrical works for Indian Bank Srinagar Colony DAMC branch at Srinagar Colony, Hyderabad.** Tender documents consisting of the plans, complete specifications, the schedule of quantities of the various classes of work to be done, and the set of conditions of contract to be complied with by the person whose Tenders may be accepted, can be purchased from the office of **M/s. SRR Architechniques, 3-6-460, 101/A & 102, Gokulkunj Street – 5, Hardikarabagh, Himayat Nagar, Hyderabad** between the hours of **10.00am to 4.00pm from 17.05.2025.** Tender document fee 500/- cash/ DD in favor of SRR Architechniques, Hyderabad.

The site for the work is available / or the site for the work shall be made available in parts as specified below.

2. Tenders, which should always be placed in a sealed cover, with the name of the project written on the envelope will be received by The **Assistant General Manager, Indian Bank Zonal office, Hyderabad (Premises & Expenditure Dept.) No: 3-6-365, Liberty Plaza, 4<sup>th</sup> floor, Himayat Nagar, Hyderabad** up to 1.00 **pm on 23.05.2025** The tenders will be opened on **23.05.2025** 4.00 pm

3. The time allowed for the carrying out of the work be **21 days** from the date of written orders to commence work.

4. The contractors should quote in figures as well as in words the rates, and amount tendered by them. The amount for each item should be worked out and the requisite totals given.

5. Earnest money, amounting to **Rs. 14,700/- (Rupees Fourteen Thousand Seven Hundred Only)** in the form of Bank draft draw in favour of **"INDIAN BANK" Zonal office, Hyderabad.** Must accompany each tender and each tender is to be in a sealed cover subscribed. **Tender for Proposed Interior Furnishing and Electrical works for Indian Bank Srinagar Colony DAMC Branch.** The EMD of the contractor whose tender is accepted, shall be forfeited in full in case he does not remit the Initial Security Deposit within the stipulated period or start the work by the stipulated date mentioned in the award letter.

6. The acceptance of tender will rest with **"INDIAN BANK"** which does not bind itself to accept the lowest tender, and or reserves to itself the authority to reject any or all of the tenders received without the assignment of a reason. All tenders in which any of the prescribed conditions are not fulfilled or are incomplete in any respect are liable to be rejected.

**INDIAN BANK** reserves the right to accept the tender in full or in part and the tenderer shall have no claim for revision of rates or other conditions if his tender is accepted in parts.

7. Canvassing in connection with tenders is strictly prohibited and the tenders submitted by the contractors who resort to canvassing will be liable to rejection.

8. All rates shall be quoted on the proper form of the tender alone.

9. An item rate tenders containing percentage below/ above will be summarily rejected.

10. On acceptance of the tender, the name of the accredited representative (s) of the contractor who would be responsible for taking instructions from the Employer/ Architects shall be communicated to the Employer.

11. Special care should be taken to write the rates in figures as well as in words and the amounts in figures only, in such a way that interpolation is not possible. The total amount should be written both in figures and words. `p` after the decimal figures, E.g Rs. 2.15 "p", and in case of words, the word "Rupees" should precede and the word "Paise" should be written at the end, unless the rate is in whole rupees and followed by the words `only` it should invariably be up to two decimal places. While quoting the rate in schedule of quantities, the word `only` should be written closely following the amount and it should not be written in the next line.

**12. INDIAN BANK** does not bind itself to accept the lowest or any tender and reserves to itself the right of accepting the whole or any part of the tender and the tenderer shall be bound to perform the same at the quoted rates.

13. Sales Tax or any other tax on material or on finished works like work's contract tax, Turnover Tax etc., in respect of this contract shall be payable by the contractor and the **INDIAN BANK** will not entertain any claim whatsoever in this respect. This particular aspect should be mentioned in tender notice.

14. The tender for works shall remain open for acceptance for a period of 3 months from the date of opening of tenders. If any tenderer withdraws his tender before the said period, then the bank shall be at liberty to forfeit Earnest Money paid along with the tender.

15. The tender for the work shall not be witnessed by a contractor or contractors who himself/ themselves has/have tendered or who may and had/have tendered for the same work. Failure to observe these conditions would render tenders of the contractors tendering as well as witnessing the tender liable to summary rejection.

16. It will be obligatory on the part of the tenderer to tender and sign the tender document for all the component parts and that, after the work is awarded, he will have to enter into an agreement for each component with the competent authority **INDIAN BANK**.

17. The tenderer, apart from being a competent contractor must associate himself with agencies of the appropriate class who are eligible to tender for other works.

**18. The quoted price shall be firm & no discounts are acceptable on the final price.**

19. If the contractor or his representatives are found to be absent from the site for more than 3 days the contract is deemed to be terminated by him.

**Signature of the Competent Authority**

## **2.GENERAL CONDITIONS OF CONTRACT**

Except where provided for in the description of the individual item in the schedule of quantities and in the specifications and conditions laid down here in after and in the drawings, the work shall be carried out as per standard specification and under the direction of Employer/ Architects.

### **1. INTERPRETATION**

In construing these conditions, the specifications, the schedule of quantities, tender and agreement, the following words shall have the meaning here in assigned to them except where the subject or context otherwise requires.

**Employer:** The term Employer shall denote **Indian Bank Zonal office, Hyderabad No: 3-6-365, Liberty Plaza, 4<sup>th</sup> floor, Himayat Nagar** any of its employee's representative authorized on their behalf.

**Architects:** The term Architects shall mean **M/s. SRR Architechniques, 3-6-460, 101/A & 102, Gokulkunj Street – 5, Hardikarabagh, Himayat Nagar, Hyderabad** or in the event of his/their ceasing to be Architects for the purpose of this contract such other persons as the employer shall nominate for the purpose.

**Contractor:** The term Contractor shall mean his/their heirs, legal representative, assignees and successors.

**Site:** The site shall mean the site where the works are to be executed as shown within boundary in red border on the site plan including any building and creations thereon allotted by the Employer for the contractor use.

**Drawings:** The work is to be carried out in accordance with drawings, specifications, the schedule of quantities and any further drawings which may be supplied or any other instruction, which may be given by the Employer during the execution of the work. All drawings relating to work given to the contractor together with a copy of schedule of quantities are to be kept at site and the Employer/ Architects shall be given access to such drawings or schedule of quantities whenever necessary.

In case any detailed drawings are necessary the contractor shall prepare such detailed drawings and / or dimensional sketches there for and have it confirmed by the Employer / Architects prior to taking up such work. The contractor shall ask in writing for all clarifications on matters occurring anywhere in drawings, specifications and schedule of quantities or for additional instructions at least 5 days ahead from the time when it is required for implementation so that the employer may be able to give decision thereon.

"The Works" shall mean the work to be excited or done under this contract.

"Act of Insolvency" shall mean any act as such as defined by the Presidency Towns Insolvency Act or in Provincial insolvency Act or any amending statuaries.

"The Schedule of Quantities" shall mean the schedule of quantities as specified and forming part of this contractor.

## **2. Scope**

The work consists of construction of Employer's (details of work) in accordance with the "drawings" and Schedule of Quantities". It includes all materials, labour, tools and equipment and management necessary for and incidental to the construction and completion of the work, during its progress and upon completion, shall conform to the lines elevations and grades as shown on the drawings furnished by the employer/architects. Should any detail essential for efficient completion of the work be omitted from the drawings and specifications it shall be for responsibility of the contractor to inform the Employers / Architects details with Employers/ Architects concurrence, so that upon completion of the proposed work the same will be acceptable and ready for use.

Employer / Architects may in their absolute direction issue; further drawings and written instructions, details, directions and explanations, which are, here after collectively referred to as "The Employers' / Architects Instructions" in regard to:

- a. The variation or modification of the design quality or quality of works or the addition or omission or substitution of any work.
- b. Any discrepancy in the drawing
- c. The removal from the site of defective material brought there on by the contractor and the substitution of any other material there of.
- d. The demolition, removal and re-execution of any work executed by the contractors.
- e. The dismissal from the work any persons employed there upon.
- f. The opening from the work of any persons covered up.
- g. The rectification and making good of any defects under causes hereinafter Mentioned and those arising during the maintenance period (retention period)

The contractor shall forthwith comply with and duly execute any work comprised in such Employer's /Architect's instruction, provided always that verbal instructions, directions and explanations given to the contractor or his representative upon the works by the Employer/ Architects shall if involving a variation be confirmed in writing to be contractor's with in five days. No works for which rates are not specifically mentioned in the period schedule of quantities shall be taken up without written permission of the Employer / Architect's. Rates of items not mentioned in the priced schedule of quantities shall be fixed by the employer in consultation with the Architects as provided in Clause "variation".

Regarding all factory make products for which BIS (Bureau of Indian Standard) marked products are available, only products bearing BIS marking shall be used in work.

## **3. TENDERER SHALL VISIT THE SITE**

Intending tenderer shall visit the site and make himself thoroughly acquainted with the local site conditions, nature and requirements of the works, facilities of transport condition, effective use of materials, access and storage for materials and removal or rubbish. The tenderer shall provide in their tender for cost of carriage, Freight and other charges as also for any special difficulties including police restriction for transport etc. for proper execution of work as indicated in the drawings.

The successful tenderer will not be entitled to any claim of commencement of the work or which in the opinion of employer/Architects might be deemed to have been inferred to so exist before commencement of work.

#### **4. TENDERS**

The entire set of tender papers issued to the tenderers should be submitted fully priced and also signed. On the page together with initials on every page. Initial/signature will indicate the acceptance of the tender papers by the tenderer.

The Schedule of quantities shall be filled as follows:

- XIX. The rate column to be legibly filled in ink in both English figures and English Words.
- XX. Amount column to be filled in for each item and the amount for each sub head as detailed in "Scheduled of Quantities"
- XXI. All corrections are to be initialed.
- XXII. The Amount column for alternative items for which the quantities are to be mentioned shall not be filled up.
- XXIII. In case of any errors, the rates given in the tender marked 'original' shall be taken as correct rates.

No notification, writings or corrections can be made in the tender papers by the tenderer, but may at his option offer his comments or modification in a separate sheet of paper attached to the original tender papers.

The employer reserves the right to reject the lowest or any tender and also to Discharge any or all the tenders for each section or split up and distribute any item of work to any specialist firm of firms, without assigning any reason.

The tenderers should note that the tender is strictly on the item rate basis and their attention is drawn to the fact that each and every item should be correct, workable and self-supporting. If called upon by the employers / Architects detailed analysis of any or all rates shall be submitted. Employer /Architects shall be not be bound to recognize the contractor's analysis.

The works will be paid for as "measured work" on the basis of actual work done and not as 'lump sum' contract.

All items of work described in the schedule of quantities are to be deemed and paid as complete works in all respects and details including preparatory and finishing works involved, directly, related to and reasonably detectable from the drawings, specifications and schedule of quantities and no further extra charges will be allowed in this connection. In the case of lump sum charges in the tender in respect of any item of works, the payments of such items of work will be made for the actual work done on the basis of lump – sum – charges as will be assessed to be payable by the Employer/ Architects.

The employer has power to add, omit from any work as shown in drawings or described in specification include in schedule of quantities and intimate the same in writing, but no

addition, omission or variation shall be made by the contractor without authorization from the Employer. No variation shall vitiate the contract.

## **5.AGREEMENT**

The successful contractor may be required to sign an agreement as may be drawn up to suit local conditions and shall pay for all stamps and legal expenses, incidental there to.

## **6.TAXES AND DUTIES**

The tenderers must include in their tender prices quoted for all duties royalties, less and sales for or any other taxes or local charges if applicable.

## **7.PROVISIONAL SUMS**

All provisional sums described in the schedule of quantities as P.S. shall be exclusively allotted to the purchase of materials and not for any handling and fixing to be done by the contractor. Such costs of handling and fixing with profit (including transport charges if the contractor) shall be separately included in the contract price as described in the schedule of quantities. The disposal of the amounts covered under this head will be absolutely at the description of the Employer. The contractor is to make payments for these materials given to them by suppliers on certificate or order issued by the Employer/Architects and realize them through his bill from the Employer/Architects.

## **8.QUANTITY OF WORK OF BE EXECUTED**

The quantities shown in the schedule of quantities are intended to cover the entire new structure in the drawings but the employer reserves the right to execute only a part of the whole or any excess thereof without assigning any reason therefore.

## **9.OTHER PERSONS ENGAGED BY THE EMPLOYEES**

The employer reserves the right to execute that part of the work included in this contract or any work, which is not included in this contract by other agency or persons and contractor shall allow all reasonable facilities and use of his scaffolding for the execution of such work; The main contractor shall extend all cooperation in this regard.

## **10. EARNEST MONEY AND SECURITY DEPOSIT**

The tender will have to deposit an amount equivalent to Rs. 14,700/- (Rupees Fourteen Thousand Seven Hundred Only) in the form of Bank Draft in favour of **Indian Bank, Zonal office, Hyderabad** at the time of submission of tender as an Earnest Money Deposit. The Employer is not liable to pay any interest on the Earnest Money. The Earnest Money of the unsuccessful tenderers will be refunded without any interest soon after the decision to award the work is taken or after the expiry of the validity period of the tender.

The successful tenderer to whom the contract is awarded will have to deposit as initial security deposit a further sum to make up 2% of the value of the accepted tender including the Earnest Money. The initial security Deposit will have to be made within 3 days from the date of acceptance of tender, failing which the Employer at his discretion may revoke the letter of acceptance and forfeit the Earnest Money deposit furnished along with tender. The initial security deposit will be refunded after satisfactory completion of work (as certified by architect). Apart from the initial security deposit made as above, retention money shall be deducted from progressive running bill @ 8% of the gross value of each running bills.



The retention amount will be refunded to the contractor 14 (fourteen) days after the end of defect liability period provided, he has satisfactorily carried out all the work and attended to all defects in accordance with the conditions of the contract. No interest is allowed on retention money.

## **11.CONTRACTOR TO PROVIDE EVERYTHING NECESSARY**

The contractor shall provide everything necessary for the purpose of execution of the Work according to the intent and meaning of the drawings, schedule of the drawings, schedule of quantities and specifications taken together whether the same may or may not be particularly shown described therein provided that the same can reasonably be inferred there from. The contractor shall provide himself for ground and fresh water carrying out of the works at his own cost. The Employer shall on no account be responsible for the expenses incurred by the contractor for hired ground or fresh water obtained from elsewhere.

The rates quoted against individual items will be inclusive of everything necessary to complete the said items or work within the contemplation of the contract, and beyond the unit price no extra payment, will be allowed for incidental or contingent work. Labour and /or materials inclusive of all taxes and duties what ever except for specific items, if any stipulated in the tender documents.

The contractor shall at all times give access to workers employed by the Employer or any employed on the buildings and to provide them with water and leave or make any holes, grooves etc., in work. Where directed by the employer as may be required to enable such workman to lay or fix pipes, electrical wiring special fittings etc. The quoted rates of the tenderers shall accordingly include all these above mentionable contingent works.

## **12.TIME OF COMPLETION / EXTENSION OF TIME & PROGRESS CHART**

The entire work is to be completed in all respects within the stipulated period of **21 days**. The work shall deem to be commenced within 2 days from the date of acceptance letter or date of handing over of site, whichever is earlier. Time is the essence of contract and shall be strictly observed by the contractor.

The work shall not be considered as complete until the Employer / Architects have certified in writing that this has been complete and the Defects Liability Period shall commence from the date of such certificate.

**Extension of Time:** If in the opinion of the Employer/Architects the works are delayed (a) by reason of any exceptionally inclement weather or (b) by reason of instructions from the employer in consequences of proceedings taken or threatened by or disputes, with adjoining or neighboring owners or (c) by the works, or delay of other contractors nominated by the employer and not referred to in the specification or (d) by the reason of authorized extra and additions or (e) by reason or any combination or works men or strikes or lock – out affecting any of the building trade or (f) from other causes which the Employer may consider are beyond the control of the contractor, the Employer at the completion of the time allowed for the contract for the control shall make fair and reasonable extension of time for completion in respect therefore. In the event of the employer failing to give possession of the site upon the day specified above, the time of completion shall be extended suitably.

In case of such strikes or lockouts as are referred to above, the contractor, shall, immediately give the employer, written notice thereof. Nevertheless, he shall use his best endeavors to prevent delay, and shall do all that may be reasonably required, to the

satisfaction of the Employer for any extension of time for completion hereunder (which shall be final and binding on the contractor) shall be promulgated at the conclusion of such strike or lock – out and the Employer shall be then, in the event of an extension being, granted, determine, and declare the final completion date. The provision in clause 13 with respect to payment of liquidated damages shall be construed as if the extended date fixed by the Employer was submitted for and the damages shall be deducted accordingly.

**Progress of Work:** During this period the contractor shall maintain proportionate progress on the basis of Program me Chart submitted by the contractor immediately before commencement of work and agreed to by the Employer/Architects. Contractor should also include planning for procurement of scarce material well in advance and reflect the same in the program me Chart so that is no delay in completion of the project.

### **13.LIQUIDATED DAMAGES**

The entry for the quantum of LD per week of delay, appropriate for the case in hand, should be selected from the following:

For contracts having time for completion 6 months and less.	1.00% of the estimated amount shown the Tender per week.
For contracts having time for completion Exceeding 6 months But not exceeding 2 years (24 months)	0.50% of the Estimated amount shown the tender per week
For contracts having Time for completion In excess of 2 years	0.25% of the Estimated amount shown the tender per week.
The entry of the quantum of the maximum LD, the accrual of which entitles the Bank conclude the the contract should be selected from the following as may applicable:	
For contracts having Time for completion 6 months and less	10.0% of the accepted Contract Sum
For contracts having Time for completion Exceeding 6 months But not exceeding 1 year	7.5% of the accepted contract sum. Subject to the provision of para below.

### **14.NOTICE AND PATENTS OF APPROPRIATE AUTHORITY AND OWNERS**

The contractor shall conform to the provisions of any acts of the legislature relating to the work, and to the Regulations and Bye laws of any authorities and / or any water, lighting and other companies, and / or authorities with whose systems the structures were proposed to have connection.

The contractor shall arrange to give all notices required for by the said Acts. Regulations or Bye – laws to be given to any authority and to pay such authority or any public officer all fees that may be properly chargeable in respect of the work and lodge the receipt with the Employer.

The contractor shall indemnify the Employer against all claims in respect or patent rights, royalties damages to building, roads or members of public in case of execution of work and shall defend all actions arising from such claims and shall keep the Employer saved harmless and indemnified in all respects from such actions, costs and expenses.

## **15. ACCESS:**

Any authorized representative of the employer shall at the reasonable times have free access to the workshop, factories or other place where materials are being prepared or constructed for the works and also to any place where the materials are lying or from where that are being obtained, and the contractor shall give every facility to the bank or their representative everything necessary for inspection and examination and test of the materials and workmanship. Except the representative of the employer no person shall be allowed at any time without the written permission of the Employer.

## **16. MATERIALS, WORKMANSHIP, SAMPLE, TESTING OF MATERIALS**

All the works specified and provided for in the specifications or which may be required to be done in the manner with materials of the best and approved quality of the respective kinds in accordance with the particulars contained in and implied by the specifications as any from their entire satisfaction. If required by the Employer / Architects during the execution of the work, and their entire satisfaction. If required by the employer / Architects the contractor shall carry tests on materials and workmanship in approved materials testing laboratories or as prescribed by the Employer/Architects at his own cost to prove that the materials etc. under test conform to the relevant B.I.S. or as specified in the specifications. The necessary charges for preparation of mould (in case of concrete cube) transporting, testing etc, shall have to be borne by the contractor. No extra payments in this account should in any case be entertained. All the materials (Except where otherwise described) stores equipment required for the full performance of the work under the contract must be provided through normal channels and must include charge for import duties, sales, tax control and other charges and must be the best of their kind available and the contractor's must be entirely responsible for the proper and efficient carrying out of work.

The work must be done in the best workman like manner. Samples of all materials to be used would be submitted to the Employer / Architects when so directed by the Employer / Architects and written approval from Employer / Architects must be obtained prior to placement of order. Should the work be suspended by reason of rain, strike, lock out or any other cause the contractor shall take all precautions necessary for the protection of work at his own expenses and shall make good any damage arising from, any of these causes. The contractor shall cover up and protect from damage from any cause, all new work and supply, temporary/doors, protection to windows and any other requisite protection for execution of the work whether by himself or special trades men or sub contractor and any damage caused must be made good by the contractor at his own expense

## **17. REMOVAL OF IMPROPER WORK**

The Employer shall during the progress of the work have power to order in writing from time to time the removal from the work within such reasonable time or time as they be specified in the order of any materials which in the opinion of the Employer/Architects are not in accordance with specification or instructions. The substitution or proper re-execution of any work executed with materials or workmanship not in accordance with the drawings and specification or instructions, in case the contract or refuses to complete and pay other agencies to carry out the work and all expenses consequent thereon or incidental therein or incidental thereto as certified by the Employer / Architects shall be borne by the contractor or may be deducted from any money that may become due to the contractor. No certificate, which may be given by the Architects, shall relieve the contractor from his liability in respect of unsound work or bad work.

## **18. CONTRACTOR EMPLOYEES**

The contractor shall employ technically qualified and competent supervisor for the work who shall be available (by turn) throughout the working hours to receive and comply with instructions of Employer / Architects. The Contractor shall engage at least new-experienced Engineer as site – in – charge for execution of the work. The contractor shall employ in connection with the work persons having the appropriate skill or ability to perform their job efficiently.

The contractor shall employ labourers on the work as far as possible.

No one below the age of sixteen years and who is not an Indian National shall be employed on the work.

Any worker supplied by the contractor to be engaged on the work on day – work basis either wholly or partly under the direct order or control of the Employer or his representative shall be deemed to be a person employed by the contractor.

The contractor shall comply with the provision of all labour legislation including the requirements of:

- a. The payment of Wages Act
- b. Employer's Liability Act
- c. Workmen's Compensation Act.
- d. Contract Labour (Regulation & Abolition) Act, 1970 and Central Rules 1971.
- e. Apprentices act 1961.
- f. Any other Act or enactment relating thereto and rules framed there under from time to time.

The contractor shall keep the Employer saved harmless and indemnified against claims if any of the workmen and all costs and expenses as may be incurred by the Employer in connections with any claim that may be made by any workman.

## **19. DISMISSAL OF WORKMEN**

The contractor shall on the request of the Employer immediately dismiss from works any person employed thereon by him, who in the opinion of Employer is unsuitable or incompetent or who may misconduct himself. Such discharge shall not be the basis of any claim for compensation damages against the Employer or their office or employees.

## **20. DAMAGE TO PERSONS AND PROPERTY INSURANCE ETC.,**

The contractor shall be responsible for any injury to the work or workmen to persons, animals or things and for all damages to the structural and / or of any sub-contractor or of any of his or sub-contractor's employees, whether such injury or damages arise from carelessness, accident or any other cause whatsoever in any way connected with the carrying out of this contract. The causes shall be held to include inter – alias, streets, foot path or ways as well as damages caused to the buildings and the works forming the subject of this Contract by rain, wind or other inclemency of the weather. The contractor shall indemnify the employer and hold harmless in respect of all and any expenses arising from any such injury or damages to persons or property as aforesaid or damage consequent upon such claim.

The employer shall be at liberty and is hereby empowered to deduct the amount of any damages, compensation, costs charges and expenses arising or accruing from or in respect of any such claim or damage from any sums due or to become due to the contractor.

## **21. INSURANCE**

Unless otherwise instructed the contractor shall insure the works and keep them insured until the virtual completion of the contract against loss or damages by fire and/or earthquake flood. The insurance must be placed with a company approved by the employer, in the joint names of the Employer and the contractor for such amount and for any further sum if called to do by the employer, the premium, of such further sum being allowed to the contractor as an authorized extra.

The contractor shall deposit the policy and receipt for premiums paid with the Employer within 7 days from the date of issue of work order unless otherwise instructed. In default of the contractor insuring as provided above, the employer on his behalf may insure and may deduct the premium paid from any bills which may become due to the contractor. The contractor shall as soon as the claim under the policy is settled or the work reinstated by the Insurance Company should they elect to do so, proceed with due diligence with the completion of the works in the same manner as through the fire has not occurred and in respects of the conditions of the contract.

## **22. ACCOUNTS RECEIPT AND VOUCHERS**

The contractor shall, upon the request of the Employer/Architects furnish them all the invoices, accounts, receipts and other vouchers that they may require in connection with the works under this contract. If contractor shall use materials less than what he is required under the contract, the values of the difference in the quantity of the materials he was required to use and that he actually used shall be deducted from his dues. The decision of employer shall be final and binding on the contractor as to the amount of materials the contractor is required to use for any work under this contract.

Before taking any measurement of any work, the Site Engineer or subordinate deputed by him shall give reasonable notice to the contractor. If the contractor fails to attend at the measurements after such notice or fails to countersign or to record the difference within a week from the date of measurement in the manner required by the Site Engineer then in any such event the measurement after such notice taken by the Site Engineer or by subordinate deputed by him as the case may be is final and binding on the contractor and contractor shall have no right to dispute the same.

## **23. ADVANCE PAYMENTS AND SECURED ADVANCES**

Advance payment for works actually executed but not measured and billed for, should not be made generally. Payment should only be made after the detailed measurements of the work are taken recorded and the contractor's bill for the same is approved by the competent Authority.

However, advance payment on the running bills to the extent of 75% of the Architect certified amount might be made whenever found necessary. In such cases, it shall be the test checking of the measurements & scrutiny of bills are completed before payment of the next running bills.

Secured advances on the security of materials brought to site may be made to the contractors whose contract is for finished work. In such cases, the competent Authority may sanction advances up to an amount not exceeding 75% of the value (invoiced/assessed value) of such materials, provided that they are of a durable / non – failure nature and that an Indemnity Bond is required on the materials and is a safeguard against losses due to the contractor postponing the execution of the work or to the shortage or misuse or the materials, and against the expense entitled, if any, for their proper watch and safe custody. Recoveries of advances so made should not be postponed until the whole of the work entrusted to the contractor is completed. They should be made from his bills for works done as the materials are used, the necessary deductions being made wherever the item of work in which they are used are billed for.

## **24. PAYMENTS**

All bills shall be prepared by the contractor in the form prescribed by the Employer/Architects. One interim bill shall be prepared every week subject to minimum value for interim certificate as stated in these documents. The bills in proper forms must be duly accompanied by detailed measurements in support of the quantities or work done and must show deductions for all previous payments etc.,

The Employer/Architects shall issue a certificate after due scrutiny of the contractor's bill stating the amount due to the contractor from the Employer and the contractor shall be entitled to payment thereof, within the period of honouring certificates named in these documents.

The Amount stated in an interim certificate shall be the total values of work properly executed and 70% of invoiced value of materials brought to site for permanent incorporation into the work up to the date of the bill less the amount to be retained by the employer as retention money vide clause 10 of these conditions and less installment previously paid under these conditions provided the certificate shall only include the value of said materials and goods as from such time as they are reasonably, properly and not prematurely brought and placed adjacent to the work and then only if adequately protected against weather or other casualties.

The employer will deduct retention money as described in clause 10 of these conditions. The refund of retention money will be made as specified in the said clause. If the Employer has supplied materials or goods to the contractor, the cost of any such materials or goods will be progressively deducted from the amount due the contractor, in accordance. All the interim payments shall be regarded as payments for work actually done and completed, and imperfect or unskilled work to be removed and taken away and reconstructed or re-erected or be considered as an admission of the due performance of the contract, or any part thereof in any respect or the according of any claim, nor shall, it determine or affect in anyway the power of the employer under these conditions or any of them as to the final settlement and adjustment of the accounts or otherwise or in any other way affect the contract. The final bill shall be submitted by the contractor within one week of the date fixed for completion of the work or of the date of certificate of completion furnished by the Site Engineer. All final payments shall be made within 3 months.

## **25. FINAL PAYMENTS**

The final bill shall be accompanied by a certificate of completion from the Architects. Payments of final bill shall be made after deduction of Retention Money as specified in clause 10 of these conditions, which sums shall be refunded after the completion of Defects Liability Period after receiving the Architects' certificate that the contractor has rectified all defects to the satisfaction of Employer. The acceptance of payment of the final bill by the contractor would indicate that he will have no further claim in respect of the work executed.

## **26. VARIATION /DEVIATION**

The price of all such additional items/non – tendered items will be worked out on the basis of rates quoted for similar items in the contract wherever existing or on engineering rate analysis based on prevalent fair price of labour, material and other components are required. The tender rates shall hold good for any increase or decrease in the tendered quantities upon variation of 25%. For variation beyond + or – 25% the rate for the respective item may be reviewed on mutually agreed terms.

## **27. SUBSTITUTION**

Should the contractor desire to substitute any materials and workmanship, he/they must obtain the designated in this specification indefinitely by such terms as "Equals" or "Other approved" etc. specific approval of the Employer/Architects has to be obtained in writing.

## **28. PREPARATORY OF BUILDING WORKS FOR OCCUPATION AND USE ON COMPLETION**

The Whole of the work will thoroughly be inspected by the contractor and deficiencies and defects put right. On completion of such inspection the contractor shall inform the Employer/Architects that he has completed the work and it is ready for inspection.

## **29. CLEARING SITE ON COMPLETION**

On the completion of the works the contractor shall clear away and remove from the site all construction plan, surplus materials, rubbish and temporary works of every kind and leave the whole of the site and the works clean and in a workman like condition to the satisfaction of the Employer / Architects.

## **30. PERIOD OF FINAL MEASUREMENT**

The entry for the period of final measurement after completion shall be made after taking into account the complexity of the work and staff available for carrying out measurements.

All hidden works shall have already been measured as the work progressed.

It should be noted that unless a longer period is stipulated, the condition of contract generally lays down three months (maximum) from the date of completion of the contract as the period of final measurement.

Even though the maximum period of three months is mentioned, it shall be endeavored to complete the measurements as expeditiously as possible.

### **31. VALUE OF WORK FOR INTERIM CERTIFICATE**

The maximum value of work done, entitling the contractor to receive an interim payment is generally arrived at after dividing the estimated value of the contract (as announced in the Notice of Tender) by the time (in months) allowed for completion of work.

The above value rounded off to the nearest thousand is entered.

### **32. DEFECTS AFTER COMPLETION**

The contractor shall make good at his own cost and to the satisfaction of employer all defects, Shrinkage, settlements or other faults, which may appear within 12 months after completion of work. In default the Employer may employ a person and amend and make good such damage, losses and expenses consequent thereon or incidental thereto shall be made good and borne by the contractor and such damages, loss and expenses shall be recoverable from his by the Employer or may be deducted from the contractor deduct from any money due to the contractor a sum equivalent to the cost of amending such work and in the event of the amount retained being insufficient, recover that balance from the contractor from amount retaining under clause No.10 together with any expenses the Employer may have incurred in connection their with.

### **33. ESCALATION**

The rate quoted shall be firm throughout the tenure of the contract (including extension of time, if any, granted) and will not be subject to any fluctuation due to increase in cost of materials, sales tax, octroi, etc., Unless specifically provided in the documents. The price variation clause being adopted by the RBI may be followed, if such a situation arises on a case – to – case basis.

### **34. IDLE LABOUR**

Whatever the reasons may be, no claim for idle labour, additional establishment cost of hire and labour charges of tools and plants would not be entertained under any circumstance.

### **35. SUSPENSION**

If the contractor except on account of any legal restraint upon the Employer preventing the continuance of the work or in the opinion of the employer shall or fail to proceed with due diligence in the performance of his part of the contract or if he shall more than once make default, the Employer shall have the power to give notice in writing to the contractor requiring the work be proceeded within a reasonable manner and with reasonable dispatch, such notice purport to be notice under this clause.

After such notice shall have been given the contractor shall be at liberty to remove from the site of the works or from any contiguous there to any plant or materials to subsist from the date of such notice being given until the notice shall have been complied with.

### **36. TERMINATION OF CONTRACT BY EMPLOYER**

If the contractor being a company into liquidation whether voluntary or compulsory or being a firm shall be dissolved or being an individual shall be adjudicated insolvent or shall make an assignment or a composition for the benefit of the greater part, in numbers of amount of his creditors or shall enter into a Deed or arrangement with his creditors, or if the official Assignee in insolvency, or the Receiver of the contractor in solvency, shall repudiate the contract, or if a insolvency, or if a Receiver of the contractor's firm appointed by the court shall be unable, within fourteen days after notice to him requiring him to do so, to show to



the reasonable satisfaction of the employer that he is able to carry out and fulfill the contract, and if so required by the employer to give reasonable security therefore, or if the contractor shall suffer execution to be issued, or shall suffer any payment under this contract to be attached by or on behalf of and of the creditors of the contractor, there under, or shall neglect or fail to observe and perform all or any of the acts matters of things by contract, to be observed and performed by the contractor within the clear days after the notice shall use improper materials on workmanship in carrying on the works, or shall in the opinion of the employer not exercise such due diligence and make such due progress as would enable the work to be completed within due time agreed upon, and shall fail to proceed to the satisfaction of the employer after three clear days notice requiring the contractor so to do shall have been given to the contractor as hereinafter mentioned or shall abandon the contract, then and in any of the said case, the employer may notwithstanding previous waiver determine the same by a notice in writing to the effect as hereafter, mentioned, but without hereby effecting the powers of the employer of the obligations and liabilities of the contractor the whole of which shall continue in force as fully as if the contract, had not been so determined and as if the works subsequently executed had been executed by or on behalf of the contractor (without thereby creating any trust in favour of the contractor) further the employer or his agent, or servants, may use other power, utensils and materials lying upon a premises or the adjoining lands or roads and sell the same as his own servants and workmen in carrying on and completing the works or by the employing any other contractor or other persons or person to complete the works and the contractor shall not in anyway interrupt or contractor or others person to complete the works and finishing or using the materials and plants for the works when the works shall be completed, or as soon thereafter as conveniently may be the employer shall give notice writing to the contractor to remove his surplus materials and plants and should the contractor fail to do so within a period of 14 days after receipt by him the employer may sell the same by public auction and shall give credit to the contractor for the amount so realized. Any expenses or losses incurred by the employer in getting the works carried out by other contractor shall be adjusted against the amount payable to the contractor by way of selling his tools and plants or due on account of work carried out by the contractor prior to engaging other contractor or against the security deposit.

### **37. ARBITRATION**

All disputes or difference of any kind whatsoever which shall at any time arise between the parties touching or concerning the works or the execution or maintenance thereof of this contract or the rights over the remaining operation or effect therefore or to the right or liabilities of the parties or arising out of in relation thereto whether during or after determination foreclosure or breach of the contract (other than those in respect of which the decision of any person is by the contract expressed to be final and binding) shall after written notice by either party to the contract to the either of them to employer hereinafter mentioned be referred for adjudicating to a sole arbitrator to be appointed as hereinafter provided. For the purpose of appointing the sole arbitrator referred to above, the employee shall send within thirty days of receipt of the notice, to the contractor a panel of three names of persons who shall be presently unconnected with the organization for which the work is executed. The contractor shall on receipt of the names as aforesaid, select any one of the persons name to be appointed as a sole arbitrator and communicate his name to the employer within thirty days of receipt of the names. The employer shall thereupon without any delay appoint the said person as the sole arbitrator. If the contractor fails to communicate such selection as provided above within the period, specified the competent authority shall make the selection and appoint the selected person as the Sole Arbitrator. The work under the Contractor, shall, however, continue during the arbitration proceedings and no payment due or payable to the contractor shall be withheld on account of such proceedings.

The arbitrator may from time to time, with the consent of the parties, enlarge the time for making and publishing the award.

The arbitrator shall give a separate award in respect of each dispute of difference referred to him. The Arbitrator shall decide each dispute in accordance with the terms of the contract and give a reasonable award. The venue of arbitration shall be such place as may be fixed by the Arbitrator at his sole discretion.

The fees, if any, of the arbitrator, shall, if required, to be paid before the award is made and published, be paid half and half by each of the parties. The cost of the reference and of the award including the fees, if any, of the Arbitrator who may direct to and by whom and in what manner, such costs or any part thereof shall be paid and, may fix or settle and amount of costs to be so said.

The award of the Arbitrator shall be final and binding on both the parties.

Subject to aforesaid the provisions of Arbitrator Act 1940 or any statutory modification or reenactment thereof and the rules made there under, and for the time being in force, shall apply to the arbitration under this clause.

The Employer and the contractor hereby also agree that arbitration under clause shall be a condition precedent to any right to action under the regard to the matter hereby expressly agreed to be so referred to arbitration

#### **OUTLINE CONDITIONS OF CONTRACT**

1. Earnest Money Deposit	:	Rs. 14,700/-
2. Defects liability period (DLP)	:	One Year
3. Date of Commencement	:	Two days from the date of award Of work.
4. Date of Completion	:	21 days
5. Security Deposit (ISD)	:	2%
6. Period of Final Measurement	:	One week from the date of Completion
7. Liquidated damages	:	1% per week
8. Value of work of interim certificate	:	Rs. 7.00 Lakhs
9. Retention Money	:	8% of the certified bill
10. Period of Honouring Certificate	:	15 days
11. Insurance	:	Workmen compensation and Contractor all risk for full Value of contract, third party liability.

#### **4. ADDITIONAL CONDITIONS OF CONTRACT**

##### **1.SCOPE OF WORK**

The schedule of Quantities and the tender drawings are only indicative of the scope of work. There may be variation in quantities of individual items as well as in the total quantum of work of upto + 20%. The contractor will not be liable to omission altogether of some of the items.

##### **2.COMPLETION SCHEDULE**

The contractor will be required to work according to a program me given to them by the Consulting Architects, based on the priorities of the Employers. The contractor will be required to prepare bar charts on the basis of the program me given to them and get these approved by Employer/Architects. While the overall completion program me of the work will be 14 days, certain items may be required to be completed in shorter periods, varying from 7 to 14 days.

##### **3. WATER AND ELECTRICAL ENERGY**

Water and electrical energy required for work be provided by the employer at one point free of charge, and the contractor will be required to make his own distribution and arrangements for them. Cost of electrical energy consumed would be payable by the contractors according to Government tariffs.

##### **4.OTHER RULES AND REGULATIONS**

- a. All E.S.I formalities or prescriptions under Workmen Compensation Act will be adhered to by the contractor. He will have to observe the regulations prescribed under the contracts Labor – Regulations & Abolition Act, 1970 and rules formed hereunder.
- b. The contractor shall not employ labor below the age of 18 years and shall pay them not less than the wages paid for similar work on the fair wage. Fair wage men's wage whether for time of piece work as defined in the Minimum Wages Act.

#### **5. PREAMBLE TO SCHEDULE OF QUANTITIES**

1. Tender shall be on the basis of item rates which shall include the cost of materials, labour, all taxes, duties, and all other appurtenant services required for the complete installation, testing and commissioning in accordance with relevant drawings and meeting the requirements of the specification and relevant I.S Specification including the fees for inspection together with the liabilities and obligations as detailed in the general conditions of contract.
2. Prices shall remain firm and free from variation due to rise and fall in the cost of materials and labor or any other price variation whatsoever whether during the stipulated period of execution or during extended period of completion if any, except direct statutory, increases by the Act of Govt. or Local bodies.
3. Item rates shall remain valid for any variation in the estimated quantities given in the schedule of quantities.

4. In order to facilitate the technical scrutiny of various quotations, the tenderer must supply with their quotations detailed technical particulars, make catalogues and erection drawings for various items under different parts specified in the schedule of quantities.
5. The drawings and specifications lay down minimum standards for equipments and workmanship. Deviations, if any, shall be clearly set down. In the absence of any deviations, it will be deemed that the tenderer is fully satisfied with the intents or the specifications and drawings and their compliance with the statutory and fire insurance provision including local codes. Where the drawings and specifications conflict the more stringent shall supply.
6. All installations shall be tested as specified and a test certificate in the prescribed form required by the authorities shall be furnished.
7. The entire installation shall be guaranteed against defective materials of workmanship for a period of 12 months from the date of installation as certified by the Architects and taken over by the owner. During the guarantee period, all the defects shall be rectified by the contractor, free of cost.
8. Water and power required for the works may be made available at site. Use of electrical power will be on chargeable basis. If the water available at site is unsuitable for construction purpose, the contractor will have to make their own arrangement for water.
9. The tenderer must acquaint themselves of the site conditions and take note of all factors while quoting the rates, so no extra will be allowed on any ground.
10. The successful tenderer shall supply completion drawings of the entire installations as executed at site drawn to a scale approved by the architects after the completion of the work but before completion certificate is given by the Architects.
11. The materials of the 1st preference shall be used and the contractor may exclude himself of not doing so only if the required range as per tender specifications is not manufactured, by the particular manufacture. The evidence of such case shall be supported by a letter from the respective manufacturer. Samples of all fittings and accessories shall be approved by the Employer/Architects prior to their installation.

## **6. ARTICLES OF AGREEMENT**

Made at Chennai between **Assistant General Manager, Indian Bank Zonal office, Hyderabad, 3-6-365, Liberty Plaza, 4<sup>th</sup> floor, Himayat Nagar, Hyderabad.** (Herein after referred to as the Employer, which expression, which expression shall include his heirs, Executors, administrators & in assigns) of the one part and (hereinafter referred to as the Contractor, which expression shall include his heirs, executors Administrators & Assigns) of the other part.

WHEREAS the employer is desirous of **Tender for Proposed Interior Furnishing and Electrical works for Indian Bank Srinagar Colony DAMC Branch.** Caused Drawing and specifications describing the work to be done by SRR Architechniques (herein after referred to as the Consulting Architects)

WHEREAS the said Drawings and the specifications and the priced Schedule of Quantities have been signed by or on behalf of the parties hereto and

WHEREAS the Contractor has agreed to execute upon and subject to the conditions, set forth herein (hereinafter referred to as "the conditions") the work shown upon "the said Drawings" and described in "the said Specification" and "the said Priced Schedule of Quantities" at the representative rates mentioned in the priced Schedule of Quantities.

**NOW IT IS HEREBY AGREED AS FOLLOWS:**

1. In consideration of the payment to be made to the Contractor as hereinafter he shall upon and subject to said conditions, execute and complete the works shown upon said drawings and such further detailed drawings as may be furnished to him by the said consulting architects and described in the said specification and the said priced Schedule of Quantities.
2. The term "Consulting Architects" in the conditions shall mean the said SRR Architectures or in the event of their death or ceasing to be the Consulting Architects for that purpose of this contract, such other person as shall be nominated for that purpose by the Employer, not being a person to whom the Contractor shall object for reasons considered to be in sufficient by the Employer. Provided always that no persons subsequently appointed to be consulting Architects under this contract shall be entitled to disregard or over-rule any decision or approval or direction or expressed in writing by the consulting Architects for the time being.
3. The plan, agreement and documents above mentioned shall form the basis of this contract and the decision of the said Consulting Engineers/Architects for the time being as mentioned in the Conditions of contract in reference to all matter of dispute as to the materials, workmanship or account and so as to the intended interpretation of the clauses of the Agreement of any other document attached hereto shall be final and binding on both parties and may be made a Rule of Court.
4. The said contract comprises the works above mentioned and all subsidiary works connected therewith within the same site as may be ordered to be done from time to time by the said employer through the consulting Architects or other the Consulting Architects for the time being, even though such works may not be shown on the drawings or described in the said specifications or the Priced Schedule of quantities.
5. The Employer reserves to himself the right of altering the drawings and nature of the work and of adding to or omitting any items of work or of having portions of the same carried out without prejudice to this contract.
6. The said conditions shall be read as forming part of this Agreement, and the parties hereto will respectively, abide by and submit themselves to the conditions and stipulations and perform the agreement on their parts respectively in such conditions contained.
7. Further, letter exchange between the Employer and the Contractor after the receipt of this contract as listed, shall form an integral part of this contract.
8. The several parts of this contract form have been read to us and fully understood by us.

As witness our hands this

Day of 2025

Signed by the Said

Employer

In the presence of

Contractor

Signed by the said

In the presence of

## 6. **SPECIFICATIONS**

All works should conform to Standards laid down by the Bureau of Indian Standards.

Wherever detailed specifications are not given, the works shall be carried out as per CPWD specifications Vol I & II with latest addition and corrections.

### **SPECIFICATIONS – GENERAL REQUIREMENTS**

1A. List of Tender drawings is given elsewhere in the Tender Documents. These drawings are meant for Tenders and Construction also. These drawings may be revised and fresh revised copies issued to the contractor from time for adoption in the work to suit the final Designs and the physical conditions encountered during the progress of the work.

1B. Figured dimensions on drawings shall only be followed and drawings to large scale shall take precedence over these to smaller scale.

1D. The contractor shall prepare, at his own cost, detailed shop drawings and shall obtain the approval of the consultant / Client before adoption.

2A. The specification is intended for general description of quality and workmanship of materials and finished work. They are not intended to cover minute details. The work shall be executed in accordance with sound engineering and other professional practice.

2B. Where reference is made to any standard specification of Bureau of Indian Standards or any other similar body, the information and provision of the latest revised edition of the specification on the date of submission of such standard specification are in conflict with the provision's standard in these specifications the latter provisions shall have precedence.

2C. All materials shall be of standard quality manufactured by reputed concerns conforming to Indian Standard or equivalent and shall have "BIS" mark as far as possible unless otherwise approved by the Consultant/ Client. The contractor shall get all materials approved by the Consultant / Client prior to procurement and use.

### **3.MEASUREMENT AND PAYMENTS**

3A. The quantities stated in the Bills of Quantities are tentative. The contractor shall be paid at the quoted rate and on the basis of actual measured dimensions of the finished work, limited however by those dimensions shown in the drawings, or as directed by the consultant / Client.

**3B.** Measurement of work shall be generally in accordance with IS: 1200 "Method of Measurement of Building and Civil Engineering Work" except where the stipulations of the Tender are contradictory.

### **4.LAYOUT AND SURVEYS**

The contractor shall be responsible for the true and proper setting out of works, for the correctness of position, levels, dimension and alignment of all part of the works and for the provision of all necessary instruments, appliances and labor in connection there with. If at dimensions or alignments of any part of work, the Contractors, on being required to do so, shall at his expenses rectify such errors. Checking of any setting out or of any line or level by the Consultant / Client shall not in any way relieve the Contractor of his responsibility for the corrections there of.

### **5.CONSTRUCTION SHCHEDULE AND TIME OF COMPLETION**

5A. A BAR chart shall be submitted by the contractor detailing out the complete construction activities for each work within 7 days of start of work at site. This chart shall be reviewed by the Consultant / Client and alterations, if any, shall be made by the contractor; this chart will form the basis or reappraisal to evaluate the progress of work at site.

5B. The drawings shall be issued to the contractor at least one week in advance before commencement of work.

5C. No extension of time shall be granted on the plea of drawings not having been received in time provided the above time schedule is adhered to.

### **6.CO-OPERATION WITH OTHER AGENCIES**

6A. During the course of implementation of this contract, several other agencies and contractors shall be working at site simultaneously. In order to effect proper co-ordination and avoid delays, it shall be the responsibility of the contractor of this Tender to give adequate notice and exact dates of the work proposed to be executed by him which requires the placement and fixation of embedment, et., by the other agencies. The safety and prevention from damage of all materials, plant etc., of other agencies or the owners during construction activities would remain with the contractor. In the event of damage or

loss, caused, indirectly or directly by contractor or his labour, he will be responsible to make good the same as advised/instructed by the Consultant /Client.

### **7.DELIVERY OF WORKS**

Every portion of the work shall be kept clear of accumulation from time to time and delivered up clear and free from all defects of every kind at the conclusion of the work.

## 8.RELATION TO OTHER DOCUMENTS

8A. The technical specification is intended for general description of items listed in the Bills of quantities. All works specified or implied in the Technical Specification form a part of the items in the Bills of Quantities. Similarly, all indications in drawings and General description of works, whether specified or implied. Form a part of the items in the Bills of Quantities.

8B. The quoted rates in the bills of Quantities shall be assumed to include all the specified and implied work of the Technical specifications, drawings and General Description of works even when not specifically mentioned in the Bills of quantities.

## 9.LIFTS AND LEADS

9A.The rates quoted for all items of work shall include all lifts and leads where applicable.

9B.All debris and waste materials shall be disposed away from the site to a far off place as directed.

### **Summary**

<b><u>Sl.No</u></b>	<b><u>Description of item</u></b>	<b><u>Amount (Rs)</u></b>
1	INTERIOR FURNISHING WORKS	
2	ELECTRICAL WORKS	
3	TOTAL	
4	Discount if Any	
5	Total	
6	GST @18%	
7	TOTAL OF INTERIOR FURNISHING AND ELECTRICAL WORKS	

**Place:**

**Date:**

**Signature of contractor with seal.**



**SCHEDULE OF QUANTITIES****INTERIOR FURNISHING WORKS.**

PROPOSED INTERIOR FURNISHING WORKS FOR INDIAN BANK, SRINAGAR COLONY DAMC BRANCH AT SRINAGAR COLONY, HYDERABAD, TELANGANA.					
SCHEDULE OF QUANTITIES, SPECIFICATIONS AND ESTIMATE: INTERIOR FURNISHING WORKS					
S.No	Item. / Particulars.	Qty.	Unit.	Rate.	Amount.
	<b>INTERIOR FURNISHING WORKS:</b>				
<b>1</b>	<b>PARTITIONS:</b>				
	<p>Providing and fixing partition in position as per design with 50mmx50mm solid wood finished section frame work @ 600mmc/c both ways screwed to the floor and ceiling with M.S.Cleats and to be treated with anti termite oil. The measurement will be taken up to the false ceiling visible height in case of full height partition. The frame work will be cladded with 9mm thick BWP Grade plywood both sides and to be finished with 1.0mm laminate as per design with approved band adhesive. extra frame work to be fixed for fixing glass. In the glazed partition 12mm thick. modiguard/Saint Gobain clear float glass with Etching/sand blusting/granular blasting to be provided duly fixed with White beach/White ceader lipping 50mmx 25mm all complete duly natural polished and Melamine finish. Incase of Full height Partly glazed partition some portion to be raised as per drawing.</p> <p>The work should be completed as per specification, design &amp; approval of the Architect. For the door 32mm solid core BWP flush door with a frame work of White beach/White ceader size 75mm x 62.5mm with necessary hold fast fixed to the wall/partition. Finished with 1.0MM laminate and lipping in all sides and 40mmx40mm white beach/white ceader wooden molulding to be provided along the periphery of the door frame. Supplying and fixing door accessory as door closure, brass hinges, Cylindrical/ Night latch locks and s.s.handle etc.</p>				
<b>1.1</b>	<b>PARTLY GLAZED FULL HT PARTITION</b>	264.76	SFT		
	Providing and fixing in position partly glazed Full Height Partition work as shown in the drawings including door as shown in the drawings in frame work at 2' x 2' grid (horizontally and vertically) comprising of 2" x 2" saal wood Section and / or as per frame work shown in the drawings with 6mm thick BWP plywood on both sides finished with 1mm thick laminates of approved shade and colours as shown in drawings.				
<b>1.2</b>	<b>SOLID FULL HEIGHT PARTITION WITH DOORS</b>	532.00	SFT		
	Providing & fixing in position solid Full height Double Skin Partition in frame work including door in 2' x 2' grid (horizontally and vertically) comprising of 2" x 2" saal wood Section with 6mm thick BWP Grade make plywood on both sides finished with 1mm thick laminates of approved make and colour, Item to include 2" x 2" sal wood member for				

	door frame. All exposed beech wood surfaces to be finished in melamine polish of matching laminate colour as directed including all necessary Stainless Steel finish fittings/ hardware, door closers, Godrej locks and wood preservative paint etc. as per list of approved material and as approved by the Project Consultant/ Bank officer complete for finished item of work in all respects.				
<b>1.3</b>	<b>HALF HEIGHT PARTITIONS</b>				
	NOTE : 1) DIMENSIONS SHOULD NOT BE DIFFERED FROM THE DRAWINGS OTHER THAN WHAT SPECIFIED IN BOQ				
	SUPPLYING AND FIXING 70 – 80 MM THICK PARTITION WITH TABLE TOP SUPPORT SYSTEMS CONSISTING OF DOUBLE SKINS USING 12MM THK PRELAMINATED PARTICLE BOARDS TILES, POLYESTER / POLY VISCOUS FABRIC CLAD MAGENTIC BOARDS & WHITE BOARDS TILE AND 12MM THK GLASS PANELS CUT IN THE PROFILE SHOWN IN DRAWINGS. THE STANDARD PARTITION HEIGHT WILL BE 1200MM - 1050MM. BASIC PARTITION FRAMES SHOULD BE USING STANDARD ALUMINIUM FRAMES TO PROVIDE RIGIDITY AND DURABILITY. STURDY LEVELERS TO COUNTER UNEVEN FLOOR SURFACE. TWO LEVELS CABLE RACEWAYS OF SIZE AND SHAPE AT ABOVE TABLETOP LVL. & OTHER AT SKIRTING LVL AS SHOWN IN THE DRAWINGS TO BE PROVIDED WITH EASILY RETRACTABLE COVERS (NO SCREWS) FOR HOUSING SOCKETS/CUTOUTS FOR ELECTRICAL AND NETWORKING. HORIZONTAL & VERTICAL TRIMS SHALL BE ALUMINIUM EXTRUDED SECTION. ALUMINIUM PROFILE FINISHED WITH EPOXY POWDER COATING TO THE APPROVED COLOUR / SHADE. THE END CAPS TO BE OF PVC				
<b>1.3.1</b>	<b>TYPE P1 - FOR TYPE A TABLES - 2400MM X (1200MM-896MM)</b>	1.00	NO		
<b>1.3.2</b>	<b>TYPE P2 - FOR TYPE B TABLES - 2175MM X (1200MM - 896MM)</b>	1.00	NO		
<b>1.3.2</b>	<b>TYPE P6 -FOR BACK OFFICE TABLES(TYPE C,E&amp;F) - 675MM X 1200MM</b>	33.00	NOS		
<b>2.0</b>	<b>DOORS</b>				
<b>2.1</b>	<b>RM CABIN DOOR</b>	21.00	SFT		

	Providing and fixing frameless fully glazed 12mm thick toughened float glass fixed with necessary patch fittings (Dorma/Ozone/Godrej make) including cutting, making holes, cutouts in the glass of required shape and size to accommodate fittings and fixing the fittings in floors, soffits, jams including necessary fixtures, screws, sealant wherever required and SS cover over patch fittings. Rate shall include necessary etching film / LOGO, approved patch fitting locking systems, 1 pair of 12" long S. S. (C Shape) Handles of approved make, floor springs, and any necessary hardware items. Top Pivot , Top Patch Fittings, Bottom Patch fittings , Floor Spring , Corner lock with strike plate and Euro Profile Cilinder, C Shape Handle 25mm dia X 300mm length)				
<b>2.2</b>	<b>BRANCH ENTRANCE DOOR</b>	21.00	SFT		
	Providing and fixing frameless fully glazed 12mm thk toughened float glass fixed with necessary patch fittings (Dorma/Ozone/Godrej make) including cutting, making holes, cutouts in the glass of required shape and size to accommodate fittings and fixing the fittings in floors, soffits, jams including necessary fixtures, screws, sealant wherever required and SS cover over patch fittings. Rate shall include necessary etching film / LOGO, approved patch fitting locking systems, 1 pair of 12" long S. S. (C Shape) Handles of approved make, floor springs, and any necessary hardware items. Top Pivot , Top Patch Fittings, Bottom Patch fittings , Floor Spring , Corner lock with strike plate and Euro Profile Cilinder, C Shape Handle 25mm dia X 300mm length)				
<b>3.0</b>	<b>TABLES:</b>				
<b>3.1</b>	<b>TYPE A - SENIOR OFFICER'S TABLE - 1800MM X 900MM</b>	1	NO		
	TABLE TOP OF SIZE MENTIONED ABOVE IN 30MM THK. MDF BOARD TABLETOP IN POST FORM LAMINATED FINISH OF APPROVED SHADE ON TWO EDGES AND TWO SIDES WITH PVC EDGE BANDING TO MATCH THE LAMINATE. THE POST FORM EDGES SHOULD BE HALF ROUND. VERTICAL LEGS & APRON IN 25MM THICK PRE LAMINATED PARTICLE BOARD WITH ONE SIDE FULL LEG AND ONE SIDE SHORT LEG OF 250MM WIDTH WITH BRACKET SUPPORT AT FREE END. MOULDED PVC KEY BOARD TRAY WITH PEN / PENCIL SLOTS AND WITH WRIST PAD MOUNTED ON HAFFLE TELESCOPIC CHANNEL FOR SMOOTH MOVEMENT, PVC WIRE MANAGER WHEREEVER REQUIRED AND A CASTOR MOUNTED MS TROLLEY ALSO TO BE PROVIDED ALONG WITH TABLE. DETACHED DRAWER PEDESTAL OF SIZE 380W X 500D X 695 HT (2 BOX AND 1 FILE DRAWER) SHALL BE MADE UP OF MDF SHADE WITH APPROVED LAMINATE AND WITH CENTRAL LOCKING WITH DUAL KEY. THE DRAWER INNER TRAY TO BE APPROVED SHADE WHICH SHOULD BE FITTED TO THE APPROVED				

	MAKE TELESCOPIC CHANNELS FOR SMOOTH MOVEMENT. THE FRONT FACIA WITH 19MM PRELAM MDF BOARD WITH 2MM THICK PVC EDGE BANDING AND				
<b>3.2</b>	<b>TYPE B -OFFICER'S TABLE - 1500MM X 675MM</b>	1	NO		
	TABLE TOP OF SIZE MENTIONED ABOVE IN 30MM THK. MDF BOARD TABLETOP IN POST FORM LAMINATED FINISH OF APPROVED SHADE ON TWO EDGES AND TWO SIDES WITH PVC EDGE BANDING TO MATCH THE LAMINATE. THE POST FORM EDGES SHOULD BE HALF ROUND. VERTICAL LEGS & APRON IN 25MM THICK PRE LAMINATED PARTICLE BOARD WITH ONE SIDE FULL LEG AND ONE SIDE SHORT LEG OF 250MM WIDTH WITH BRACKET SUPPORT AT FREE END.MOULDED PVC KEY BOARD TRAY WITH PEN / PENCIL SLOTS WITH WRIST PAD MOUNTED ON HAFLE TELESCOPIC CHANNEL FOR SMOOTH MOVEMENT, PVC WIRE MANAGER WHEREEVER REQUIRED AND A CASTOR MOUNTED MS TROLLEY ALSO TO BE PROVIDED ALONG WITH TABLE. DETACHED DRAWER PEDESTAL OF SIZE 380W X 500D X 695 HT (2 BOX AND 1 FILE DRAWER) SHALL BE MADE UP OF MDF SHADE WITH APPROVED LAMINATE AND WITH CENTRAL LOCKING WITH DUAL KEY. THE DRAWER INNER TRAY TO BE APPROVED SHADE WHICH SHOULD BE FITTED TO THE APPROVED MAKE TELESCOPIC CHANNELS FOR SMOOTH MOVEMENT. THE				
<b>3.3</b>	<b>TYPE D - FRONT OFFICE TABLE - 1200MM X 675MM</b>	20	NOS		
	TABLE TOP OF SIZE MENTIONED ABOVE IN 30MM THK. MDF BOARD TABLETOP IN POST FORM LAMINATED FINISH OF APPROVED SHADE ON TWO EDGES AND TWO SIDES WITH PVC EDGE BANDING TO MATCH THE LAMINATE. THE POST FORM EDGES SHOULD BE HALF ROUND. VERTICAL LEGS & APRON IN 25MM THICK PRE LAMINATED PARTICLE BOARD WITH ONE SIDE FULL LEG AND ONE SIDE SHORT LEG OF 250MM WIDTH WITH BRACKET SUPPORT AT FREE END. MOULDED PVC KEY BOARD TRAY WITH PEN / PENCIL SLOTS WITH WRIST PAD MOUNTED ON HAFLE TELESCOPIC CHANNEL FOR SMOOTH MOVEMENT, PVC WIRE MANAGER WHEREEVER REQUIRED AND A CASTOR MOUNTED MS TROLLEY ALSO TO BE PROVIDED ALONG WITH TABLE. DETACHED DRAWER PEDESTAL OF SIZE 380W X 500D X 545 HT (1 BOX AND 1 FILE DRAWER) SHALL BE MADE UP OF MDF SHADE WITH APPROVED LAMINATE AND WITH CENTRAL LOCKING WITH DUAL KEY. THE DRAWER INNER TRAY TO BE APPROVED SHADE WHICH SHOULD BE FITTED TO THE APPROVED MAKE TELESCOPIC CHANNELS FOR SMOOTH MOVEMENT. THE FRONT FACIA				

	WITH 19MM PRELAM MDF BOARD WITH 2MM THICK PVC EDGE BANDING AND				
4	<b>TYPE S1 - SIDE CREDENZA/STORAGE - 1050L X 450D X 700HT.</b>	2	NOS		
	FREE STANDING SIDE CREDENZA OF ABOVE MENTIONED SIZE WITH OPENABLE SHUTTERS IN 19MM THK PRELAMINATED MDF BOARD , 19MM THK PRELAM MDF BOARD FOR VERTICALS & BOTTOM, BACK OF 9MM THK PRELAM PARTICLE BOARD, WITH BACK TO BE INSERTED IN THE GROVES PROVIDED IN THE VERTICALS TOP AND BOTTOM, WITH PVC EDGE BANDING ON ALL EXPOSED EDGES, 25MM THK TOP IN POST FORMED LAMINATED ON FACING EDGE AND OTHER THREE SIDES EDGE BANDED, ADJUSTABLE SHELVES AT APP 16" C/C.WITH 19 MM. WITH PRE LAMINATED PARTICLE BOARD & ALL NECESSARY FITTINGS LIKE 4" LONG SS BRUSHED FINISH HANDLES, TOWER BOLTS, SELF CLOSING HAFELE MAKE HINGES, GODREJ MAKE/HAFELE MAKE LOCKS & ANY MISCELLANEOUS ITEMS. THE BOTTOM FACING SKIRTING TO BE IN SAME LAMINATE				
5	<b>FALSE CEILING</b>	756.00	SFT		
	Providing & fixing false ceiling at all heights with GRG (Glass Fibre, Reinforced Gypsum) false ceiling tiles of Size 595x595 mm of approved texture, design and patterns having moisture content less than 2%, humidity resistance of 99%, NRC 0.50 to 0.75 as per IS 8225:1987, Non combustible as per BS 476 (part-4)-1970 and light reflectance of 85% (minimum) to be laid in true horizontal level suspended on inter-locking metal T-Grid of hot dipped galvanised iron section of 0.33mm thick (galvanized @ 120 grams per sqm including both sides) comprising of main-T runners of size 15x32 mm of length 3000 mm, cross - T of size 15x32 mm of length 1200 mm and secondary intermediate cross-T of size 15x32 mm of length 600mm to form grid module of size 600 x 600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 grams per sqm) i.e. 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod up to 1000 mm length and L-shape level adjuster of size 85x25x2 mm. Galvanised iron perimeter wall angle of size 24x24x0.40 mm of length 3000 mm to be fixed on periphery wall / partition with the help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall SS screws. The work shall be carried out as per specifications, drawing and as per directions of Engineer-in-Charge.				
	With semi perforated 12 mm thick micro tegular edged GRG false ceiling tiles				
6	<b>STORAGES</b>				

	Providing and fixing in position Back & Half height storages using 18mm thick BWP Grade Plywood of Shutters, Vertical and bottom, back 6mm thick BWP Grade plywood finished with 1mm thick laminates and all other sides shall be finished with white enamel paint as detailed therein. The Storage Units shall be provided with handles( Stainless Steel finish )as per approval of the Project Consultant / Bank. All exposed plywood surfaces to be finished with 1mm thick laminate of approved make & shade and all exposed edges of plywood to have 1" x ¼" Hard wood lipping. All exposed Hard wood sections to be melamine in matching colour laminate and internal surfaces to have white enamel paint as directed. Item to include all necessary hardware and fittings in Stainless Steel finish, Godrej multipurpose locks including magnetic ball catcher etc. complete for the finished item of work.				
<b>6.1</b>	<b>Back and Full Height Storage</b>	27.50	SFT		
<b>7.0</b>	<b>VITRIFIED FLOORING</b>	756.00	SFT		
	Providing and fixing VITRIFIED Tiles of approved make, shade and pattern as shown in the drawings. / as approved by Bank/ Architect. In CM 1:4 in proper line and level with out spacers for maintaining the grid lines. Rate shall be inclusive of providing and laying necessary PCC and Cement Mortar for a thickness of 3" and joint filling compound of the same shade of the tiles and including pop covering on the new flooring for the protection of tiles with base covering plastic.				
	600mm x 600mm type (approx.) (laying with approved tile adhesive)				
<b>8</b>	<b>ROLLER BLINDS</b>	58.50	SFT		
	Supply and fixing of Roller Blinds of approved make Mac/ Vista, quality and colour shade & pattern. The roller blinds to be fitted on to aluminium powder coated channels with height adjustment ropes complete with installation hardware etc.,				
<b>9</b>	Removal of existing partitions, Main Entrance Door, brick wall, existing flooring, RCC shelves, partitions, dump the near dump yard and temporary arrangement for the bank operations till to the completion of the work. Item including all necessary tools, accessories, labour charges, painting for the walls and columns, complete for the finished item of work.	1.00	LUMP SUM		
	<b>TOTAL OF INTERIOR FURNISHING WORKS</b>			<b>RS</b>	

**Place:**

**Date:**

**Signature of contractor with seal.**

**SCHEDULE OF QUANTITIES  
ELECTRICAL WORKS.**

PROPOSED ELECTRICAL WORKS FOR INDIAN BANK, SRINAGAR COLONY DAMC BRANCH AT SRINAGAR, HYDERABAD, TELANGANA.					
SCHEDULE OF QUANTITIES, SPECIFICATIONS AND ESTIMATE: ELECTRICAL WORKS					
Sl. No.	Particulars	Qty.	Unit	Rate	Amount (Rs.)
<b>I.</b>	<b>POINT WIRING</b>				
<b>Note:</b>	Supply, laying, connection & testing of light, fan point, wiring by 2x1.5sq.mm+1x1.5sqmm PVC insulated copper flexible wire maintain the colour code as per direction in PVC conduit of 20mm with ISI mark 1.5mm thickness to conceal in wall partition mending good the damage, complete with PVC circular box, bend to be done as per drawings including 3point ceiling orse wherever required GI saddle to be used for fixing, metal flexible, PVC flexible pipe may use if required in partition wall. All PVC pipes should be with ISI mark. No joints will be allowed inside pipe, light, fan & plug point complete with modular type switch plate & MS box. Including the main circuit line 2x2.5sqmm+1x1.5sqmm earth PVC insulated copper wire, maintain the color code. Circuit line for lighting switch board, 6Amps plug board are to be drawn from lighting DB to lighting board & plug point board,6/16 amps plug point line are to be draw from power DB amps plug to be & to 6/16plug point board.3no's lighting board,3no's 6amps connected from one circuit & one 2 no's 6/16plug to be connected from one circuit.				
	All the wires 4 Sqmm and above shall be terminated with Copper pin type Lugs.				
	Light point complete with modular type witch, plate, M.S conceal box.				
<b>1.1)</b>	a)1 Light control by 1switch	33	PTS		
	b)2 Light control by 1switch	10	PTS		
<b>1.2)</b>	5 Amp. Socket (Dependent)				
	Supply and fixing of 5 Amp. 5 pin combined switch socket outlet with switch in lighting control board including interconnections. (Lopped from nearest switch board)	4	NOS		
<b>1.3)</b>	Wall Mounted Fan Point				
	Supply and wiring similar to item similar to the above but for wall Mounting fan point including box and 5 Amp. Control switch, Providing Clamp.	10	PTS		

<b>1.4)</b>	Call bell point with 1 Buzzer				
	Supply and wiring same as item 1.1 above but for Call bell point including supply and fixing of 5A bell push along with Buzzer	1	NO		
	RAW POWER:				
<b>1.5)</b>	Raw Power Socket: Supplying and fixing metal box of 180mm X 100mm X 60mm deep (nominal size) on concealed with suitable size of phenolic laminated sheet cover in front including providing and fixing 6 pin ,15/16 A socket outlet and 15/16 A piano type switch, connections, painting etc. as required, supply and wiring with 2 runs of 2.5 Sq.mm with 1 runs of 1.5 Sq.mm copper wire FRLS for earth continuity in 2mmsqmm thick PVC conduit with all required accessories, complete for the finished item of work.	22	NOS		
<b>1.6)</b>	Supply and fixing of 16A DPMCB on a suitable metal box concealed in wall with supply and laying of 3 Core 4.0 Sq mm Copper armoured cable as required for Split Air conditioners.	4	NOS		
<b>1.7)</b>	RUN OF MAINS:				
	Supply and wiring with 650V grade PVC insulated Copper Conductor multistrand wires in heavy gauge 25/32mm dia MS conduit concealed in wall/in suitable width casing and capping of approved quality along with required accessories etc. Laid on ceiling through partitions.				
<b>a)</b>	4 runs of 6 Sq.mm with 2 runs of 4 Sq.mm including supply and laying of suitable dia MS conduit with all accessories (LDB & PDB)	48	MTS		
<b>b)</b>	Incoming Cable from VTPN DB to AC SUB DB : Supply and installation of Aluminium Armoured, 25sqmm x 3½core LTUG cable 1100V grade IS 1554 either in ground, trench, Surface with all required accessories including labour complete.	52	MTS		
<b>c)</b>	Supply and End termination of 3½ x 25 Sqmm Aluminium Armored Cables with required Gland, Copper Lugs and all materials etc., complete.	2	SETS		
<b>1.8)</b>	MCB Distribution Boards				
	Supply and installation of following size MCB.				
	Distribution Boards (Double door IP 42) with MCBs. The MCBs/MCB Isolators shall conform to IS 8828.				



a)	<b>Lighting DB's:</b> Supply, installation of 6way 7 segment DB's for DX <sup>3</sup> MCB, Isolator, RCCB and RCBO: With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCB's as (1) 63 A 4 Pole MCB- 1no (Input From Main DB), (2) 40A 2P 30mA RCCB- 3no (3) 6-10A SP MCB-14nos for raw power sockets and light point circuits (4) 16A SP MCB-2 nos of water cooler, Pantry power point	1	NO		
b)	<b>AC Sub DB's:</b> Supply and Fixing of 4 Way Horizontal TPN DB with 1 No. 63 Amp TPN (10 KA) MCB with 63 A DP RCCB (100 MA) each phase as Incomer and 25 Amps SP MCB - 4 No's , 20 Amps SP MCB - 4 No's , 16 Amps SP MCB - 4 Nos .	1	NO		
<b>2.00</b>	<b>TELEPHONE WIRING</b>				
a)	Supply and fixing of RJ 11 Telephone point socket with 2 Pair Telephone Cable From Each Table to EPABX , this include suitable Surface/ concealed box and required all materials this Includes Supply and fixing of Suitable PVC Conduits and Cable Numbers to provided, item including Wiring of Telephone Points Wiring with 5 Pair Copper cable and suitable conduits, required all materials etc.	23	SETS		
c)	Supply and fixing of 30Pair Termination EPBX Box with Connectors	1	NO		
d)	Main Lines Upto EPBX Line 10 Pair Finolex .5mm Copper Cable With Conduits etc	28	MTS		
<b>3.00</b>	<b>LAN WIRING:</b>				
a	Providing and fixing of Lan points <b>Double Line</b> Laying of 4Pair, UTP cat 6 Systimax Lan Cable with Information outlet and Suitable 2mm Thick PVC Pipe Laying Below Flooring/Wall/Slab etc MS Junction Boxes to All Tables , Including all Related Civil Works etc All Cable Numbers to be Provided at both ends	22	NOS		
b	Supply of 7 feet Patch Cords.	22	NOS		
c	Supply of 3 feet Patch Cords.	22	NOS		
d	Supply and Fixing of CAT-6 , 24 Port Jack Panel,	2	NOS		
e	Supply and fixing of 9U Rack with all accessories (Self, Cable Manager, Power Manager)	1	NO		
f	Supply and fixing of d-Link 10/100A mbps port switch	1	NO		
<b>4</b>	<b>SUPPLY AND FIXING &amp; CONNECTION OF LED LIGHT FITTING /FANS:</b>				

<b>a)</b>	Supply & Fixing of Havells Make 18W four feet LED Light (LHEXBQP7IN1W018) or equivalent with all required accessories, including the cost and conveyance and all necessary taxes, GST Tax etc., for required labour, material and necessary tools and accessories to execute the work complete for finished item of work..	5	NOS		
<b>b)</b>	Supply and Fixing of Havells Make LED Venus Neo 2x2 34W Panel Light (LHEWBPP7PK1W034) or equivalent with all required accessories, including the cost and conveyance, required labour charges, material and necessary tools and accessories to execute the work complete for finished item of work	21	NOS		
<b>c)</b>	Supply and Fixing of Havells 15W LED Down Light (LHEWEKP7PL1W015) or equivalent with all required accessories, including the cost and conveyance and all necessary taxes, GST Tax etc., for required labour, material and necessary tools and accessories to execute the work complete for finished item of work.	17	NOS		
<b>4.1)</b>	Wall mounted fans (FULL METAL BODY WITH HOUSING) 450 mm dia. make As specified in tender document or approved by concerned office in charge. (Orient Torando Wall-II)	10	NOS		
<b>5</b>	<b>UPS WIRING</b>				
<b>5.1)</b>	Supply and fixing of 3 nos. of flush type 6A, 5 pin combined switch socket outlets in the modular type plastic box including 1 no of 16A switches in a separate box above table and front plates including interconnections, item including 3 core x 2.5sqmm multistrand copper conductor FRLS wires with suitable size heavy guage PVC Conduit concealed in wall/flooring (including cutting and filling) or suitable width casing and capping of approved quality along with required accessories and interconnections.	24	NOS		
<b>5.2)</b>	Supply and fixing of 1no. of flush type 16A, 5 pin sockets with 1 No 16A Switch in the modular type plastic box including Interconnections With 3x2.5Sqmm Wire for Printer point	2	NO		
<b>5.3)</b>	Run of mains				

	Supply and wiring with 650V grade PVC insulated Copper Conductor multistrand wires of following sizes in suitable size heavy gauge MS conduits concealed in wall/flooring and with suitable width casing and capping of approved quality alongwith required acc				
<b>a)</b>	2runs of 6sq.mm with 1run of 4 sq.mm for earth (UPS to UPS DB)	52	MTR		
<b>5.4)</b>	12 way SPN MCB DB - Double Door - (Horizontal type) with 32A, DP MCB as incomer and 10 nos. 6-10A SPMCBs as out goings (UPSDB)	1	NO		
<b>5.5)</b>	Supply, installation, testing and commissioning of 40 A DP MCB with encloser for UPS Incoming.	2	NOS		
<b>6.00</b>	<b>Inverter Wiring for the DAMC BRANCH</b>	1	Job work		
	Supply and wiring of Inverter wiring using of 2 Core 2.5 Sqm and 1 core of 1.5 sqmm for Inverter to DB's, Item including out put and in put wiring using of 2 Core 4 Sqmm and one core of 2.5 sqmm, item including of input and out put 16A sockets, item including all necessary items, labour charges, complete for the finished item of work.				
<b>7)</b>	<b>EARTHING</b>				
<b>a</b>	Providing standard Copper Plate Earth station, with 600x600x3.15mm thick copper plate including construction of brick pedestal, providing meshed funnel, CI cover and other Civil Engineering Works, spreading a homogeneous mixture of salt charcoal around the pipe etc, for sophisticated Earthing.	1	SET		
<b>b</b>	Supply and laying of following size copper earth wire/strips including excavation and refilling of earth when laid in ground and with all fixing accessories when laid inside the building including all necessary interconnections with earth station.				
	i) 8 SWG Copper wire in PVC Conduit	35	MTR		


<b>8)</b>	Removal of existing circuit wiring, point wiring, lan wiring, telephone wiring, ac wiring, UPS wiring, Raw power wiring, switch boards, sockets, fans, tube lights, down lights, dump the near dump yard and temporary arrangement for the bank operations till to the completion of the work. Item including all necessary tools, accessories, labour charges, complete for the finished item of work.	1.00	LUMP SUM		
	<b>TOTAL OF DAMC BRANCH ELECTRICAL WORKS</b>			<b>Rs.</b>	


Note:1	The Quantities of the above items may be increased or decreased as per site condition and the bank has got the right to delete or increase/ decrease any quantity as per the convenience at the branch. However, the contractor shall have binding over the rates quoted by them.				
Note:2	The make of all the material Specified above shall be followed as per the list of material approved and enclosed here with				

**Place:**

**Date:**

**Signature of contractor with seal.**

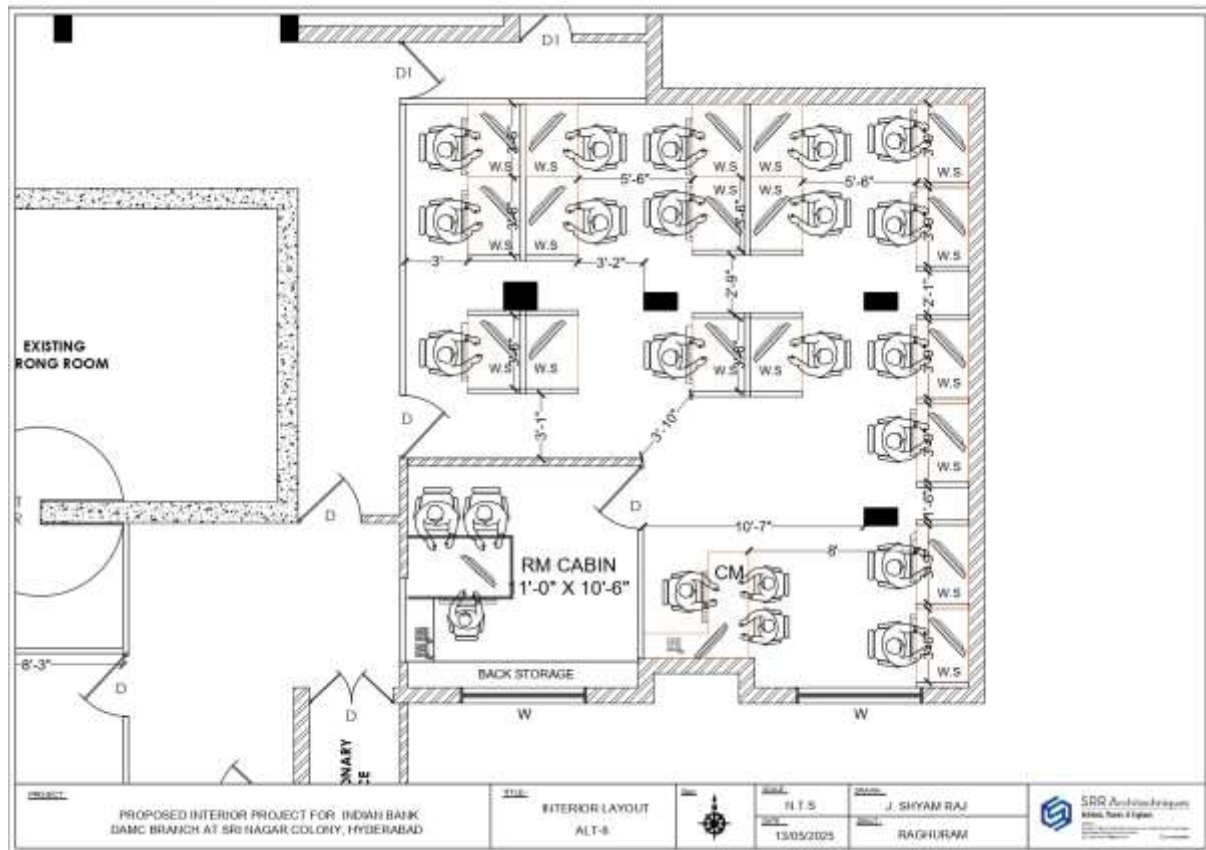

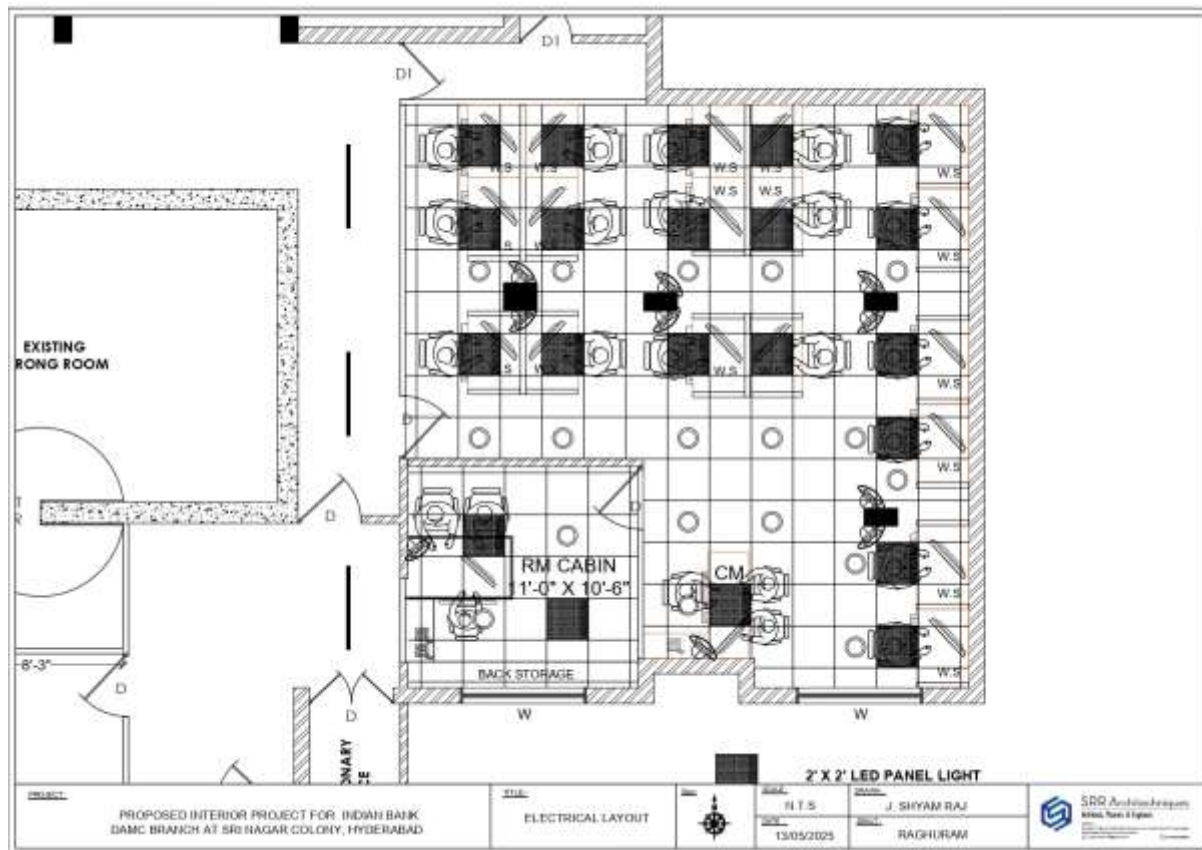

## **LIST OF TYPE AND MAKE OF MATERIALS TO BE USED**

### **(INTERIOR FURNISHING WORKS)**

<b>Sl. No.</b>	<b>Description</b>	<b>Material</b>	<b>1.Colour shade 2. Code No. 3. Name of Manufacturer</b>
1	False ceiling – Banking hall	12mm thick Gypsum Board & 12mm thick Mineral fiber tile*	1.White 2.India Gypsum & Armstrong, Gyproc, USG ceiling or equivalent*
2	False ceilings - Cabins	12mm thick Mineral fiber tile* 600mm x 600mm	1.White 2. Armstrong, Diamond, Gyproc, USG ceilings or equivalent
3	Partitions	Frame work: Made of 50 x 50mm hard wood like sal wood/hillock or equivalent	1. 2. 3.
		PLYWOOD ISI MARKED AND AS PER IS 710, BWP GRADE (GURJAN CORE) 9mm thick	1. Century ply Club 2. Green ply Gold 3. ARCHIDPLY CLASSIC, Black Coat, Niconply, Micasaply or equivalent
		Laminates: 1.0mm thick laminate*	1. Fusion Maple (wood finish)* 2. Formica, 3. Euro lam, 4. Archid Green lam, Merino or equivalent*
4	Counters/tables	PLYWOOD ISI MARKED AND AS PER IS 710, BWP GRADE (GURJAN CORE), 19mm, 12mm, 9mm thickness	ARCHIDPLY CLASSIC/SILVI, Century Ply Club, Green Ply Gold, Black Coat, Niconply, Mikasaply or equivalent.
		Laminates:1.5 mm thick for table top and other s 1.0mm thick laminate*	1. Fusion Maple (wood finish)* Formica, Euro lam, Green lam, Merino or equivalent*
5	Column cladding	Laminate 1.0mm	1. Fusion Maple (wood finish)* with regular skirting* Formica, Euro lam, Green lam, Merino or equivalent*
6	Wall painting	Acrylic Emulsion	1.Sugarcane Asian paints, Berger paints, ICI, Nerolac or equivalent
7	Ceiling painting	Premium Emulsion	1.White/ Raindrops* Asian Paints, Berger Paints, ICI, Nerolac or equivalent*

8	Pinup Board for work station	Fabric	1.Maroon Velvet or equivalent
9	Sofa sets	Fabric – back & sides	1.Maroon
		Visitor seating	1. SS perforated* seated with end arm airport chair*
10	Chairs	Fabric	1.Maroon Godrej, wipro, Featherlite or equivalent*
11	Painting exterior	Texture – Classic or fine*	1.Grey – white Heritage, Spectrum, Alltek or equivalent
		Exterior emulsion	1.Grey/White Asian Paints, Berger Paints, ICI, Nerolac or equivalent*
12	Painting for Rolling shutter	Synthetic enamel paint	1.Oxford Blue Asian paints, ICI Paints, Nerolac or equivalent*
13	Vertical blinds	Fabric*	1.MAC, Vista or equivalent*
14	Doors and window painting	Synthetic Enamel paint	1.Light Brown (Sandstone colour) Asian paints, Berger paints, ICI, Nerolac etc or equivalent
15	DOOR CLOSER	Floor spring, Door closer	HARDWIN/ EVERITE/ DORMA/EFFICIENT GADGETS.
16	HANDLES	For Storage, Doors	BRUSH STEEL FINISHED OF DOORSET, KITCH, KIRCHEFF, HATRDWIN
17	HINGES	For doors, storages	BRASS
18	MELAMINE	For beading	ASIAN IN MATT FINISH
19	ADHESIVES	For partitions, tables	ASIAN TRUGRIP
20	ALL SCREWS	For partitions, tables	GKW/ NETTLE FOLD
21	PATCH FITTING	For Doors	EBCO, GODREJ, HARDWIN
22	MAGNETIC CATCHER	For Storages	MUKUND
23	WOODEN BEADING	For Partitions, tables, storages	STEAM BEECH WOOD.
24	ALL LOCKS	For tables, storages	GODREJ, EBCO, DOORSET FOR DOORS, STORAGES.



## LIST OF TYPE AND MAKE OF MATERIALS TO BE USED

### (ELECTRICAL WORKS)

	Approved Make	Make Offered by the Tenderer
Switches	<b>M.K Blenze/ Legrand Myrius, Crabtree Verona</b>	
PVC insulated copper conductor – FRLS Grade	<b>KEI FRLS/ APAR FRLS, HAVELLS FRLS</b>	
PVC conduit – Medium thick	<b>Vasavi / Avon / ITP/ Sudhakar</b>	
DBs	<b>Legrand EkinoX<sup>3</sup> / INDO ASIAN "Optipro"/ Havells</b>	
MCBs, ELCBs, RCBOs, RCCBs	<b>Legrand EkinoX<sup>3</sup> / INDO ASIAN "Optipro"/ Havells</b>	
Cables	<b>Wipro Suraksha, Finolex, Havells</b>	
Metal clad sockets	<b>Legrand EkinoX<sup>3</sup> / INDO ASIAN "Optipro"/ Havells</b>	
6 – 16 A single pole switches, sockets, ceiling roses etc.	<b>M.K Blenze/ Legrand Myrius, Crabtree Verona</b>	
FANS	<b>HAVELLS/ ORIENT</b>	
Light LED fixtures	<b>Philips/ Havells / Panasonic/ Wipro</b>	
Data/ Lan	<b>D-Link</b>	

**NOTE :**

The contractor shall use only above mentioned material or equivalent make to be approved by the Consultant. All other materials shall confirm to the specifications laid down. The tenderer shall take this into account while tendering rates / prices. The Consultant / Owner has got every right to select any of the above Makes for the Project. However the samples of every material including all fixing accessories shall be got approved by Owner / Consultant before Execution.